

**LARSEN BAY** (2A3)(PALB) 0 SE UTC-9(-8DT) N57°32.11' W153°58.60'**KODIAK**

87 B NOTAM FILE ENA

**RWY 04-22:** 2690X75 (GRVL) MIRL 0.5% up SW**RWY 04:** Brush.**RWY 22:** Brush.**SERVICE:** LGT ACTIVATE MIRL Rwy 04-22 and rotating bcn—CTAF.**AIRPORT REMARKS:** Unattended. Rwy condition not monitored, recommend visual inspection prior to using. Loose 3' to 6' rocks on Southeast rwy edge full length. Rwy 04 ovrrn soft with deep ruts. Rwy 04-22 slopes down toward midpoint. Rwy 04 and Rwy 22 thld marked with lgts, plastic reflectors and thld panels.**AIRPORT MANAGER:** 907-487-4952**COMMUNICATIONS:** CTAF 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE ADQ.**KODIAK (H) VORW/DME** 117.1 ODK Chan 118 N57°46.50' W152°20.39' 241° 54.7 NM to fld. 133/14E.

VOR unusable:

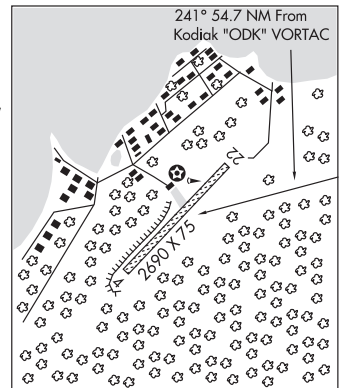
190°-310° byd 15 NM blo 12,000'

DME unusable:

154°-265° byd 15 NM blo 12,000'

266°-305°

306°-341° byd 15 NM blo 12,000'

**COMM/NAV/WEATHER REMARKS:** For a toll free call to Kenai FSS dial 1-866-864-1737.**LAWING** (9Z9) 1 N UTC-9(-8DT) N60°24.71' W149°22.16'**ANCHORAGE**

484 NOTAM FILE ENA

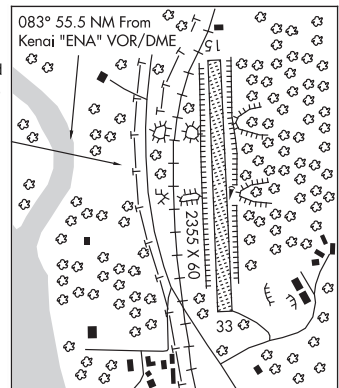
**RWY 15-33:** 2355X60 (GRVL) 0.6% up NW**RWY 15:** Trees.**RWY 33:** Tree.**AIRPORT REMARKS:** Unattended. Maintenance irreg. Rwy cond unmon, rcmdnd visual insp bfr use. Ovrrn downslope 5%. Vehicles on rwy. Rwy 15-33 thr panels dmgd, undulates, soft durg spring, ruts E side. Rwy 15-33 edge not mkd. Windsock blw treeline, may be unreliable.**AIRPORT MANAGER:** 907-288-2428**COMMUNICATIONS:** CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE ENA.**KENAI (H) VORW/DME** 117.6 ENA Chan 123 N60°36.88' W151°11.71' 083° 55.5 NM to fld. 115/19E.

VOR unusable:

348°-015° byd 20 NM

DME unusable:

355°-041° byd 35 NM blo 2,000'

**COMM/NAV/WEATHER REMARKS:** For a toll free call to Kenai FSS dial 1-866-864-1737.**LAWRENCE AIRSTRIP** (See WASILLA on page 253)