

CONNER**WEST FORK LODGE** (4U7) 5 SW UTC-7(-6DT) N45°51.74' W114°13.07'**GREAT FALLS**

4249 NOTAM FILE GTF

RWY 02-20: 2600X65 (TURF-GRVL) 0.7% up S**RWY 02:** Road.**RWY 20:** Road.

AIRPORT REMARKS: Unattended. Livestock, birds and wildlife invof arpt. No sn plowing in winter. Rwy 02-20 ocnl grvl down cntr of rwy-sm1 dip 600 ft fm Rwy 20 end. Steep terrain surrounding arpt. Trees and structures in transitional sfc full length both sides of ry. Rwy 02 +70 ft trees 600 ft fm rwy end & mtn 2700 ft fm thld; Rwy 20 +135 ft tree 80 ft right & 120 ft fm rwy end; +115 ft trees beginning 91 ft right pentg apch sfc.

AIRPORT MANAGER: (831) 884-3602**COMMUNICATIONS: CTAF** 122.9**CLEARANCE DELIVERY PHONE:** For CD ctc Salt Lake ARTCC at 801-320-2568.**CONRAD** (S01) 1 W UTC-7(-6DT) N48°10.10' W111°58.59'**GREAT FALLS**

3548 B NOTAM FILE GTF

L-13C**RWY 06-24:** H4602X75 (ASPH) S-18, D-24 PCR 76 F/D/X/T MIRL**IAP**

0.4% up SW

RWY 06: PAPI(P2L)—GA 3.0° TCH 45'. P-line.**RWY 24:** REIL. PAPI(P2L)—GA 3.0° TCH 27'.**RWY 15-33:** 2800X100 (TURF) 0.4% up SE**SERVICE: FUEL** 100LL **LGT** ACTVT REIL Rwy 24; PAPI Rwy 06-24;

MIRL Rwy 06-24—CTAF.

AIRPORT REMARKS: Unattended. 100LL 24/7 self svc. Twys have reflectors.**AIRPORT MANAGER:** (406) 450-1620**COMMUNICATIONS: CTAF/AUNICOM** 122.8**CUT BANK RCO** 122.2 (GREAT FALLS RADIO)® **SALT LAKE CENTER APP/DEP CON** 133.4**CLEARANCE DELIVERY PHONE:** For CD ctc Salt Lake ARTCC at 801-320-2568.**RADIO AIDS TO NAVIGATION:** NOTAM FILE CTB.**CUT BANK (VL) (DH) VORW/DME** 113.35 CTB Chan 80(Y)

N48°33.90' W112°20.60' 131° 28.0 NM to fld.

3791/17E.

VOR unusable:

049°-053° byd 40 NM

061°-073° byd 40 NM

079°-090° byd 40 NM

125°-130° byd 40 NM

143°-149° byd 40 NM

167°-177° byd 40 NM blo 9,000'

167°-177° byd 54 NM

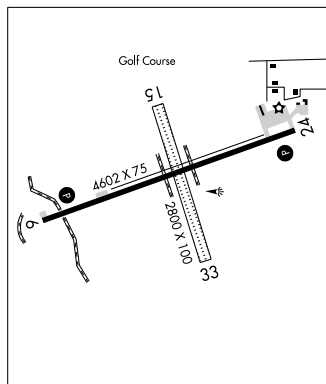
178°-190° byd 40 NM

191°-201° byd 40 NM blo 12,000'

191°-201° byd 53 NM

202°-260° byd 40 NM

271°-282° byd 40 NM

**COPPERTOWN** N46°01.92' W112°44.85' NOTAM FILE BTM.**GREAT FALLS****(VL) (L) VORW/DME** 116.05 CPN Chan 107(Y) 309° 8.8 NM to Bowman Fld. 5780/16E.**L-13C**

VOR unusable:

105°-292° byd 40 NM

125°-135° byd 30 NM blo 15,000'

160°-270° byd 24 NM blo 17,000'

293°-303° byd 40 NM blo 13,000'

293°-303° byd 46 NM

304°-327° byd 40 NM

351°-080° byd 20 NM blo 15,000'

355°-098° byd 40 NM

DME unusable:

025°-050° byd 30 NM

051°-100° byd 30 NM blo 15,000'

125°-135° byd 30 NM blo 15,000'

160°-269° byd 24 NM

270°-290° byd 24 NM blo 17,000'

291°-314° byd 25 NM blo 13,000'

315°-325° byd 25 NM blo 15,000'

326°-345° byd 25 NM blo 13,000'

351°-024° byd 30 NM blo 15,000'