MARANA

MARANA RGNL (AVQ)(KAVQ) 15 NW UTC–7 N32º24.57´ W111º13.10´ **PHOENIX**
2032 B TPA—See Remarks NOTAM FILE PRC **H–4J, L–5C**
RWY 12–30: H6901X100 (ASPH) S–75, D–100, 2S–160, 2D–300 **IAP**
MIRL 0.3% up SE
RWY 12: REIL. PAPI(P4L)—GA 3.06º TCH 45´.
RWY 30: REIL. PAPI(P4L)—GA 3.41º TCH 45´. Rgt tfc.
RWY 03–21: H3892X75 (ASPH) S–75, D–100, 2S–135, 2D–150
MIRL
RWY 03: REIL. PAPI(P2L)—GA 2.91º TCH 53´. Thld dsplcd 494´. Road. Rgt tfc.
RWY 21: REIL. PAPI(P2L)—GA 2.91º TCH 41´. Brush.

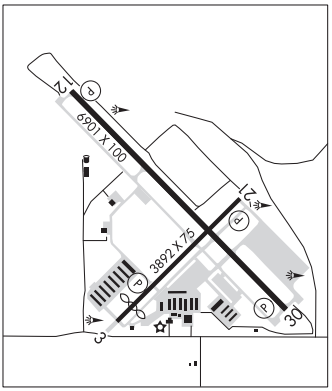

SERVICE: S3 **FUEL** 100LL, JET A++ **OX** 3 **LGT** ACTVT REIL Rwy 12 and 30; MIRL Rwy 03–21 and 12–30—CTAF. PAPI Rwy 03, 12, 21 and 30 on consly. Rwy 21 PAPI unusable byd 7.0 NM due to trrn. Rwy 30 PAPI unusable byd 3.5 NM due to trrn.
AIRPORT REMARKS: Attended 1400–0030Z. Self svc credit card fuel H24. Aft hr call out fee — 520–730–4318. Parachute Jumping. Formation flt PPR wi 5 NM – amgr. Aerobatic act 2 mi SE SFC–7000 ft MSL; High and Low level prcht trng NW quad. Hot air balloon ops not authorized. Hel Ind SE helipad only; fuel and term ramp Indg not authorized. Rwy 12 calm wind rwy. Preferred TPA—3000´ MSL, light aircraft; 3500´ MSL, heavy aircraft. Note: See Special Notices Glider Operations Northwest of Tucson, Arizona.
AIRPORT MANAGER: 520-382-8053
WEATHER DATA SOURCES: AWOS–3 118.375 (520) 682–1397.
COMMUNICATIONS: CTAF/UNICOM 123.0
Ⓡ**TUCSON APP/DEP CON** 119.4
CLEARANCE DELIVERY PHONE: For CD ctc Tucson Apch at 520-829-6121.
RADIO AIDS TO NAVIGATION: NOTAM FILE TUS.
TUCSON (VH) (H) VORTACW 116.0 TUS Chan 107 N32º05.71´ W110º54.89´ 309º 24.3 NM to fld. 2671/12E.
VOR unusable:
050º–080º byd 30 NM blo 11,500´
066º–076º byd 40 NM blo 11,500´
066º–076º byd 48 NM
077º–131º byd 40 NM
141º–164º byd 40 NM
191º–231º byd 40 NM
245º–249º byd 40 NM
275º–285º
290º–300º byd 40 NM blo 8,000´
290º–300º byd 52 NM
330º–341º byd 40 NM blo 9,000´
330º–341º byd 52 NM
342º–065º byd 40 NM
350º–020º byd 30 NM blo 13,000´
TACAN AZIMUTH unusable:
050º–080º byd 30 NM blo 11,500´
155º–165º byd 35 NM blo 13,000´
350º–020º byd 30 NM blo 13,000´
DME unusable:
050º–080º byd 30 NM blo 11,500´
155º–165º byd 35 NM blo 13,000´
350º–020º byd 30 NM blo 13,000´