

RNP APCH - GPS.


▼

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. When local altimeter setting not received, use LYO altimeter setting and increase LPV DA to 2181 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 2356 feet and all visibilities ¾ SM. Increase all MDAs 100 feet and LNAV visibility Cat C/D ¾ SM, and Circling visibility Cat C/D ¼ SM. Baro-VNAV and VDP NA when using LYO altimeter setting.

MISSED APPROACH: Climb to 4000 direct HESMA and hold.

AWOS-3PT 119.275	KANSAS CITY CENTER 118.8 322.425	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

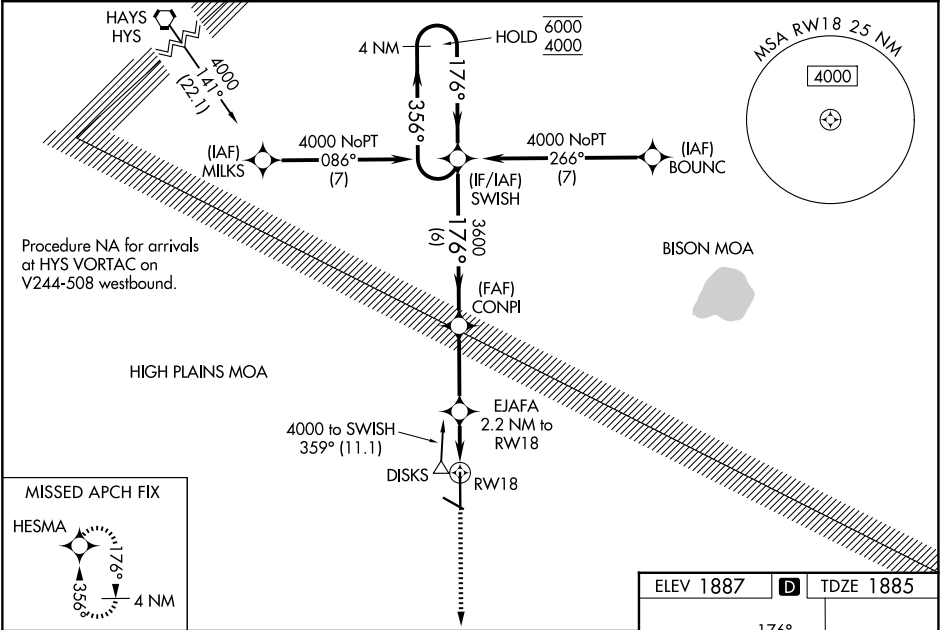

4 NM Holding Pattern

SWISH

GP 3.00° TCH 40

VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 38).

4000 HESMA

6000 ← 356°

4000 → 176°

3600

3600

2620

6 NM

3.1 NM

1.3 NM

0.9 NM

CONPI

EJAFA 2.2 NM to RW18

0.9 NM to RW18

RW18

CATEGORY	A	B	C	D
LPV DA		2085-¾	200 (200-¾)	
LNAV/VNAV DA		2260-1	375 (400-1)	
LNAV MDA		2260-1	375 (400-1)	
CIRCLING	2300-1 413 (500-1)	2340-1 453 (500-1)	2520-1¾ 633 (700-1¾)	2640-2½ 753 (800-2½)

