

WAAS CH 93932 W01A	APP CRS 007°	Rwy Ldg TDZE Apt Elev	8001 1387 1409
----------------------------------------	------------------------	-----------------------------	-------------------------------------------


RNAV (GPS) RWY 1

BEECH FACTORY (BEC)



NA Baro-VNAV NA when using Wichita Dwight D Eisenhower Nfl altimeter setting.
 For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Obtain local altimeter setting on CTAF; when not received, use Wichita Dwight D Eisenhower Nfl altimeter setting and increase all DA 36 feet and all MDA 40 feet; increase LPV all Cats and LNAV/VNAV all Cats visibility 1/8 mile, LNAV Cat C and D and Circling Cat C and D visibility 1/4 mile.

MISSED APPROACH:
 Climb to 3000 direct DOLBE and hold.

AWOS-3PT 119.45	WICHITA APP CON 134.8 269.1	BEECH TOWER ★ 126.8 (CTAF) 0 313.6	GND CON 121.7	UNICOM 122.95
---------------------------	---------------------------------------	----------------------------------------------	-------------------------	-------------------------

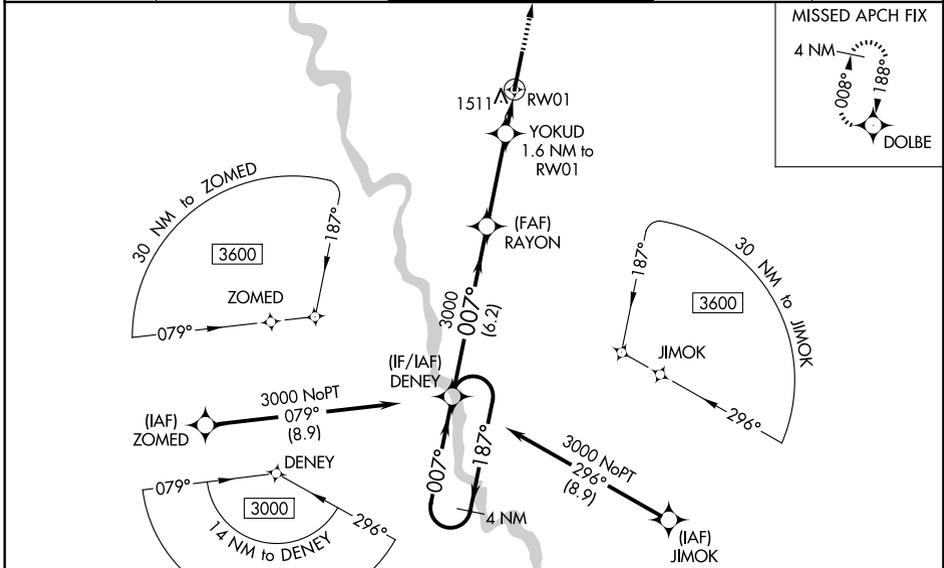

ELEV 1409	TDZE 1387
MIRL Rwy 1-19 0	REIL Rws 1 and 19 0

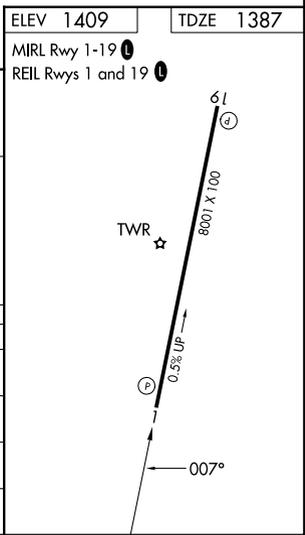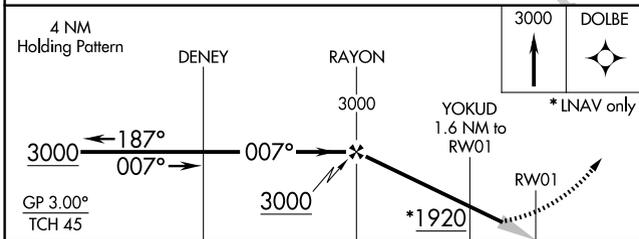

CATEGORY	A	B	C	D
LPV DA	1637-3/4		250 (300-3/4)	
LNAV/VNAV DA	1688-1		301 (300-1)	
LNAV MDA	1780-1	393 (400-1)	1780-1 1/8	393 (400-1 1/8)
CIRCLING	1820-1 411 (500-1)	2120-1 711 (800-1)	2120-2 711 (800-2)	2120-2 1/4 711 (800-2 1/4)

NC-2, 19 FEB 2026 to 19 MAR 2026

NC-2, 19 FEB 2026 to 19 MAR 2026