

WAAS
CH **40314**
W36A

APP CRS
356°

Rwy Ldg
TDZE **2189**
Apt Elev **2189**

RNAV (GPS) RWY 36

WEST WOODWARD (WWR)

RNP APCH - GPS.

▼

▲


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Baro-VNAV and VDP NA when using GAG altimeter setting. When local altimeter setting not received, use GAG altimeter setting and increase LPV DA to 2435 feet and LNAV/VNAV DA to 2510 feet; increase all MDAs 40 feet and LNAV visibility Cat C/D ½ SM, and Circling visibility Cat D ½ SM.

MISSED APPROACH:
Climb to 4000 direct DEANA and hold.

AWOS-3
118.425

KANSAS CITY CENTER
126.95 379.2

UNICOM
122.8 (CTAF) 0

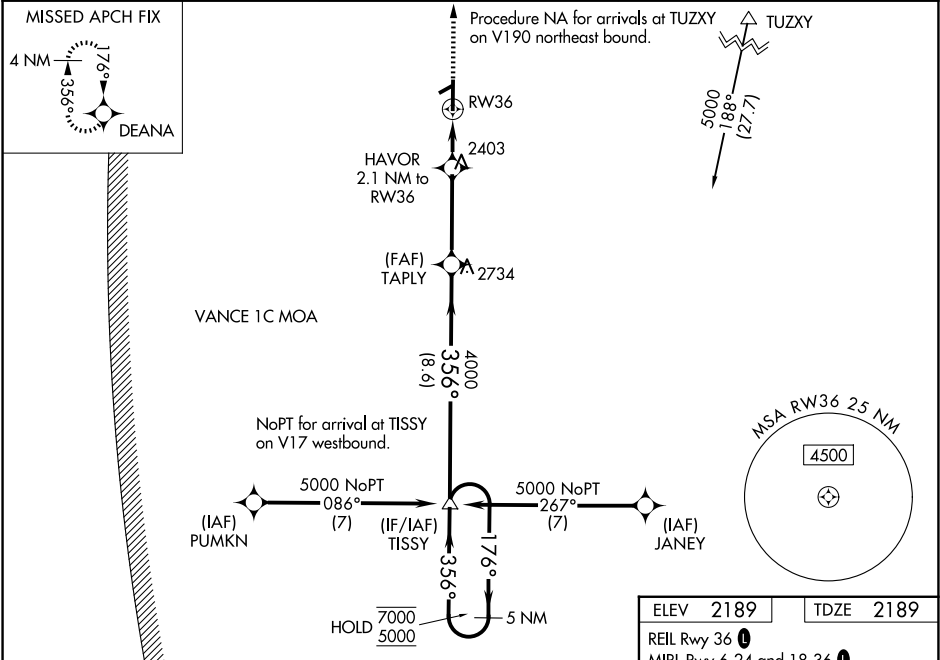

5 NM Holding Pattern

TISSY

7000

5000

176°

356°

GP 3.00°

TCH 41

TAPLY

4000

HAVOR

2.1 NM to RW36

1.5 NM to RW36

RW36

2900

4000

8.6 NM

3.5 NM

0.6

1.5 NM

4000

DEANA

CATEGORY	A	B	C	D
LPV DA	2395-1		206 (300-1)	
LNAV/VNAV DA	2470-1		281 (300-1)	
LNAV MDA	2720-1	531 (600-1)	2720-1½	531 (600-1½)
CIRCLING	2720-1 531 (600-1)	2840-1 651 (700-1)	2940-2¼ 751 (800-2¼)	2960-2½ 771 (800-2½)

ELEV **2189**

TDZE **2189**

REIL Rwy 36 0

MIRL Rwy 6-24 and 18-36 0

81

2500 x 60

0.5% UP

100 x 202

600

36

356°