

WAAS CH 58347 W06A	APP CRS 062°	Rwy Ldg TDZE 830 Apt Elev 830
--	------------------------	---

RNAV (GPS) RWY 6

GALLATIN COUNTY (8GK)

RNP APCH - GPS.



▼

▲ NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using IMS altimeter setting. Procedure NA at night. Rwy 6 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use IMS altimeter setting and increase LPV DA to 1091 feet; increase LNAV/VNAV DA to 1141 feet; increase all MDAs 80 feet and LNAV visibility Cat C ¾ SM, and Circling visibility Cat C ½ SM.

MISSED APPROACH: Climb to 1400 then climbing right turn to 2700 direct PABRE and hold.

AWOS-3P 119,15	CINCINNATI APP CON 128.7 254.25	CTAF 122.9
--------------------------	---	----------------------

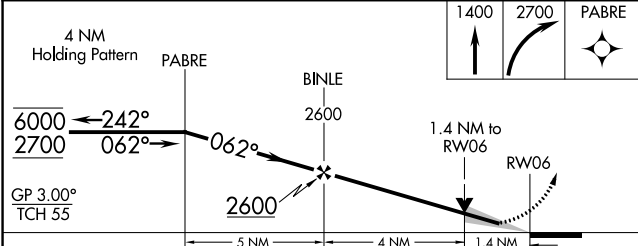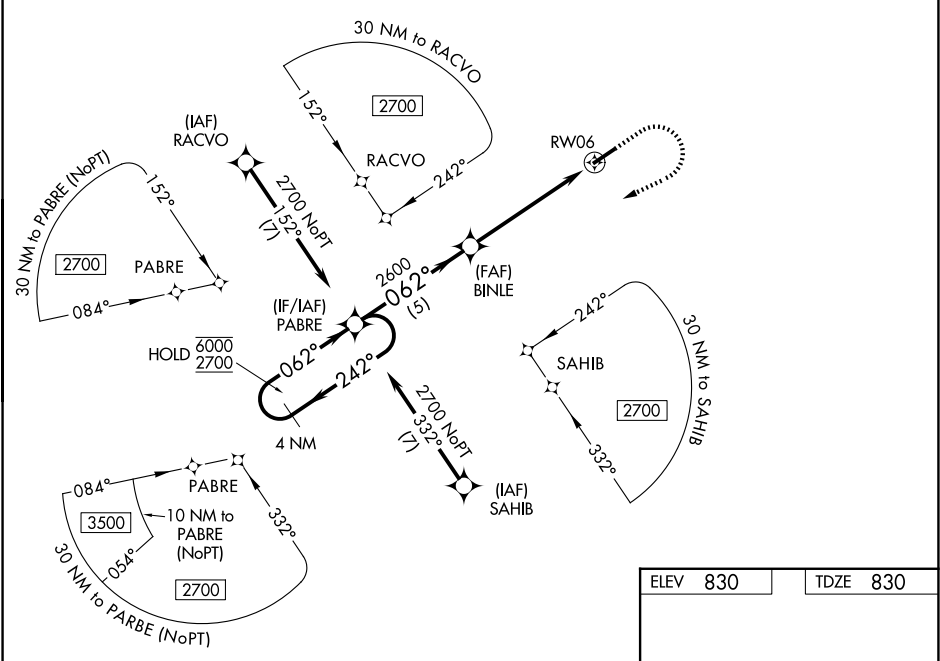

CATEGORY	A	B	C	D
LPV DA		1030-1	200 (200-1)	NA
LNAV/VNAV DA		1080-1	250 (300-1)	NA
LNAV MDA	1340-1	510 (600-1)	1340-1 3/8 510 (600-1 3/8)	NA
CIRCLING	1340-1 510 (600-1)	1500-1 670 (700-1)	1500-1 3/4 670 (700-1 3/4)	NA

